




LeROI® Gas Compressors

by Rotary Compression Technologies, Inc.

HG20 Series

Model HG20XXX Gear Drive, HG20000 and HGF20000 Non-Geared

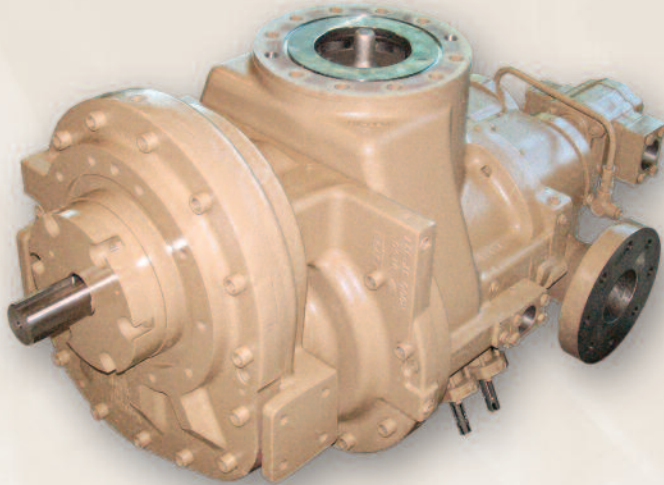

HG20XXX
Compressor with Versatrol Capacity Control and Oil Pump

PERFORMANCE

- Brake HP 300 Max.
- Flow Range (MSCFD) 4,000 Max.
- Inlet Pressure 20" Hg Vac. Min.*
50 PSIG Max.
- Discharge Pressure 20*-350 PSIG (MAWP)
- Speed Range

HG20XXX	500 RPM Min. 3,600 RPM Max.
HG20000	1,400 RPM Min. 5,000 RPM Max.
HGF20000	940 RPM Min. 3,300 RPM Max.

* Consult Factory for use with lower vacuum inlet or discharge pressures.

BENEFITS

Rotary Screw Compressors are very cost-effective for handling high volumes of gas in field gathering, vapor recovery, and other applications. The HG20 Series is suitable for applications to 300 BHP and 350 PSIG discharge pressure. Low maintenance and high reliability are inherent with rotary screws because they have few moving parts. There are no valves, rings or packing to wear out or cause loss of efficiency.

Smooth operation results from no unbalanced forces and no pressure pulsation. No foundation is required. There are no piping vibrations from pressure pulsation. Direct coupled natural gas engine or electric motor drives are equally acceptable with the HG20XXX and HGF20000 rotary screws. The HG20000 is suitable for electric motor drive.

LeROI Rotary Screw Gas Compressors are available in 12 models covering a flow range of 20 to 15,000 MSCFD and horsepower from 10 to 800.


FEATURES

Single-Stage operation from 20 PSIG to 350 PSIG maximum is possible with the HG20 Series oil-flooded compressors. Compressor packages are therefore simple, reliable and inexpensive.

The gas differential pressure provides oil circulation for proper lubrication at differential pressures over 60 PSI. Optional oil pumps are available for applications with less than 60 PSI differential pressure.

Discharge porting can be selected to match the internal compression to the application requirement for maximum compression efficiency.

All iron or steel construction with no copper or copper alloys makes these compressors compatible with natural gas, sweet or sour.

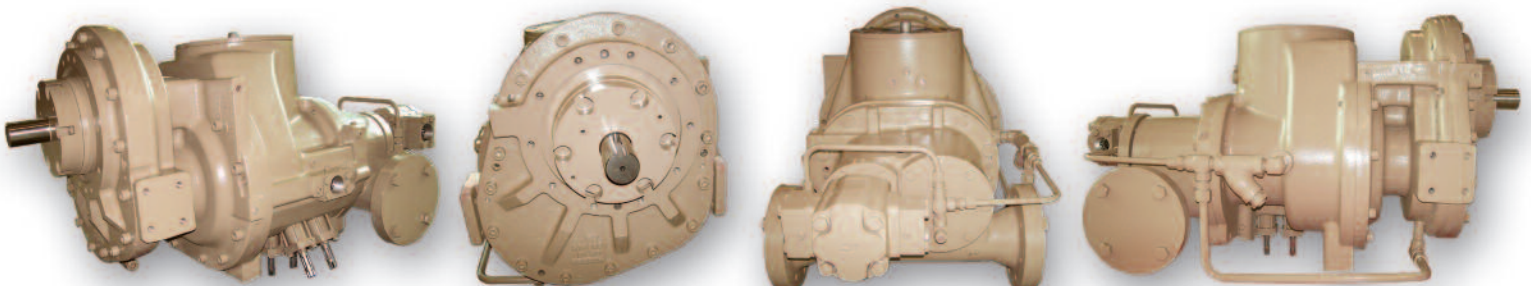



LeROI® Gas Compressors

by Rotary Compression Technologies, Inc.

HG20 Series

Model HG20XXX Gear Drive, HG20000 and HGF20000 Non-Geared

Options and Specifications

TECHNICAL SPECIFICATIONS

- Model HG20
- Rotor Dia. 204 mm (8.03 inches)
- Rotor L/D 1.65
- Rotor Description:
 - Twin Screw SRM Profile with Sealing Strips,
 - 4 Lobe Male, 6 Lobe Female
- Shaft Seal(s) – Mechanical*
- Drive System:
 - > HG20XXX
 - Internal Helical Speed Increasing Gears (AGMA 11)
 - Gear Ratios of .753 - 2.778 are available.
 - Rotation - Facing Shaft - CW
 - Drive Shaft 2-1/8" Dia. with 1/2" Square Key
 - HG20000
 - > Rotation - Facing Shaft - CCW
 - Suitable for electric motor or belt drive - oversized input bearings for belt side load up to 100 HP.
 - Drive Shaft 2-1/8" Dia. with 1/2" Square Key
 - HGF20000
 - > Rotation - Facing Shaft - CW
 - Drive Shaft 2-1/8" Dia. with 1/2" Square Key
 - Suitable for electric motor or belt drive - oversized input bearings for belt side load up to 100 HP.
- Materials:
 - Rotors – Ductile Iron 65-45-12
 - Castings – Ductile Iron 65-45-12
 - Bearings – Roller bearings on the inlet end and tapered roller bearings on the discharge end – alloy steel races, rolling elements and cages.

- Weight:
 - HG20XXX - 2,000 pounds
 - HG20000/HGF20000 - 1,650 pounds

* LeROI's mechanical seals prevent air from entering the gas stream when operated with any attainable vacuum inlet gas pressure

OPTIONS

- Versatrol Internal Bypass Valves:
 - Versatrol internal bypass valves are available for efficient capacity control from 100-50% of design flow. Control can be manual with four steps or stepless with a microprocessor. Control system is not included.
- Fixed VI: H=5.0, M=3.0, L=2.0
Variable VI: Consult Factory
- Oil Pump:
 - Integral oil pumps are available for low-pressure differential applications
- SAE # 2 Flywheel Housing (BOLT-ON)
- SAE # 2 to SAE # 1 Flywheel Housing Adapter

APPLICATIONS

- Gas Gathering
- Well Head Gas Compression
- Fuel Gas Boosting
- Vapor Recovery
- Inert Gas Boosting
- Landfill Gas

Visit www.leroigas.com for additional information.



LeROI® Gas Compressors

by Rotary Compression Technologies, Inc.

211 East Russell Road
Sidney, Ohio 45365

Telephone: 937.498.2555
Fax: 937.492.3424

www.leroigas.com
Email sales@leroigas.com



LeROI is an ISO 9001:2008 registered company

LeROI Gas Compressors policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Brochure re-order ref: #RCTHG20 02/2010